

FS330Z FALCON

Model:

Working height:

FS330Z

Maximum reach:
Jib arm:

33 m
16 m - 19 m
110°

Basket load:

200 kg

Aluminium basket:
Basket rotation:
Turret rotation:

(0,8 x 1,4 m)
+/- 90°
375°


Dimensions (transport position)

Total height:
Total length:
Total width (min):
Gradability (standard):
Weight approx.:


2,27 m
7,40 m
1,1 – 1,5 m
20°/37%
5.900 kg



FS330Z

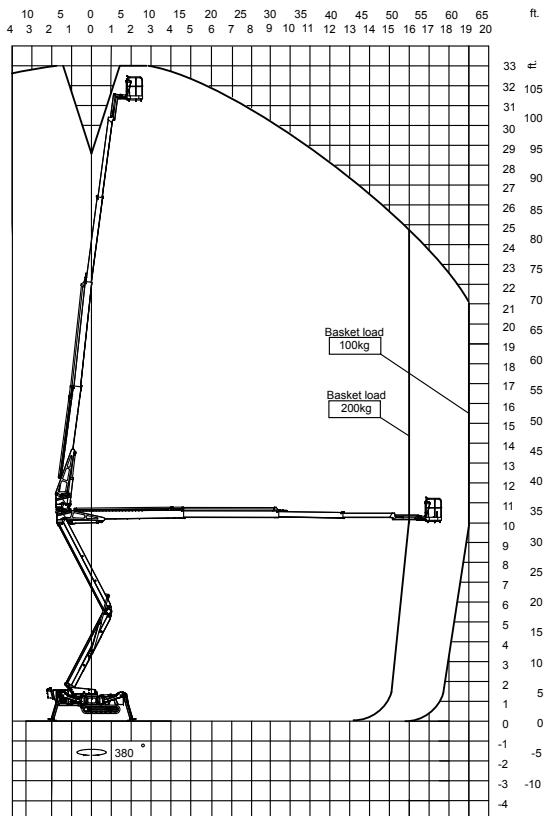


Basket load 200 kg



All measurements in meters

Basket load 100 kg



Standard equipment:

- Automatic stability & outreach control
- Computer controlled (can-bus)
- Proportional control of functions
- Self-propelled 2 speed selection
- Battery powered with charger 180Ah
- Jib-arm 110°
- 375° turret rotation with integrated stop
- +/-90° basket rotation
- Electronic checking of power system (PLC)
- Manual pump system for emergency lowering
- Ability to self-load onto trucks and trailers
- Variable width, hydraulic (1,1m-1,5 m)
- Minimum width only 1,1 m.
- Space for tools, etc. in basket
- Storage room in chassis with key lock
- Diesel engine, Kubota 3 cyl. 21,7 kW
- Wireless remote control of all functions
- 110V/220V AC power supply in the basket
- Non marking crawlers
- Individual setting of each outrigger

Options:

- IDRC – Interactive Directional Remote Control
- Hazard lights kit (strobe lights, working lamp)
- Protection kit (enhanced shields/covers)
- 400V AC direct powered electro motor
- Autosetting / levelling
- Special outrigger footplates
- Special colour